



hearing aids are more comfortable to wear and allow for quicker, more accurate adjustments.




Flute H ITC

Specifications

- * Optimized DSP hearing aid
- * Up to 8 Channels WDRC Multi Memories Amplifier
- * 12 Bands Frequency Shaping
- * 10 Bands Layered Noise Reduction
- * Adaptive feedback cancellation
- * Up to four programs
- * Low Battery Warning
- * Telecoil function (optional)


Fitting Range

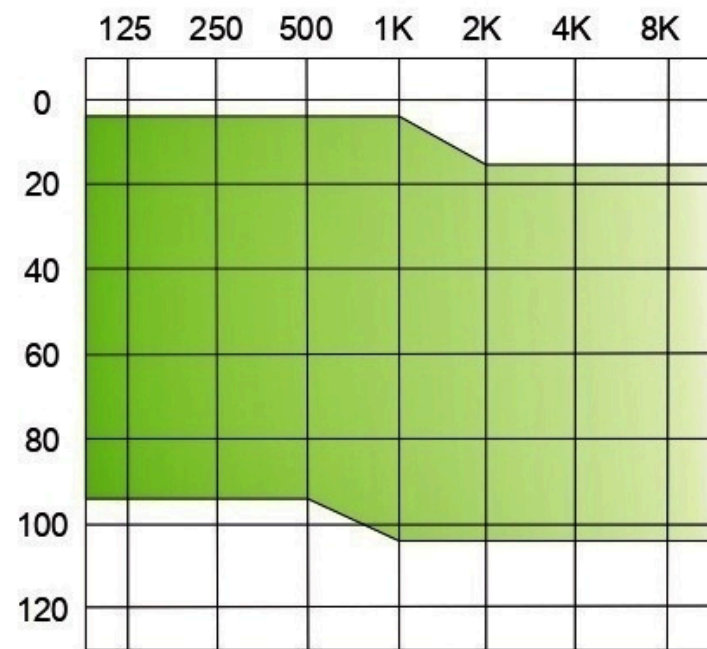

Technical Data

	Flute H ITC
Maximum Output	130
HFA Avg Output	121
Maximum Gain	58
HFA Avg Gain	49
EQ Input Noise	≤30
THD@500Hz	≤3.0
THD@800Hz	≤3.0
THD@1600Hz	≤3.0
Freq Range F1	≤600
Freq Range F2	≥4800
Battery Current(mA)	≤1.2

Testing Diagram

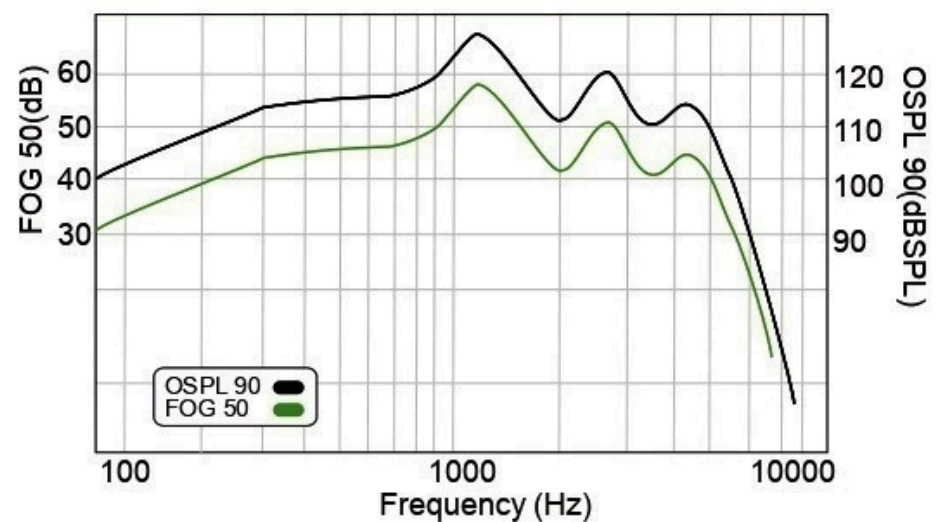

IEC-118-7/2005 (2cc-coupler)

IMHear Corporation

Add:1503 Brook Dr Downers Grove,IL 60515 US TEL: 001-630-395-9628
 Website: www.imhearing.com Email: info@imhear.comcastbiz.net