




Users love the Dolce's small size, simple operation, and high performance.

It's the ideal choice for Mild Hearing Loss. It's rich in processing features despite it's nearly Invisible size.

- \* Use 10A battery
- \* Height: 0.6"
- \* Dome: 3 sizes available
- \* Programmable: 4 listening programs

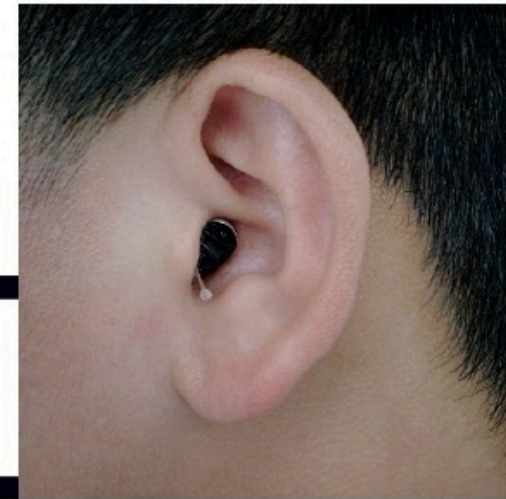


# Dolce

## Specifications

- \* Invisible and Standard CIC instrument
- \* High-performance DSP hearing aid
- \* Up to 32 channels WDRC multi memories amplifier
- \* 12 Bands Frequency Shaping
- \* 12 Bands Layered Noise Reduction (Advanced)
- \* 3rd generation of industry-leading AFC technology
- \* Up to 32 Channels adjustable MPO Control
- \* Acoustic Push Button
- \* Low Battery Warning
- \* Switch Tones
- \* Power-on Delay
- \* Datalogging
- \* Build-in Audiometer
- \* Tinnitus Treatment

## Fitting Range

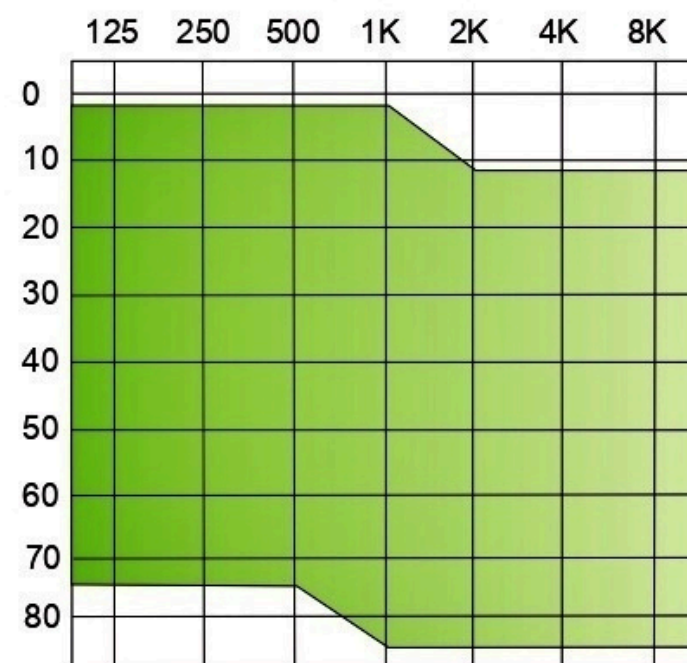


## Technical Data

	Dolce III
Maximum Output	108
HFA Avg Output	104
Maximum Gain	25
HFA Avg Gain	19
EQ Input Noise	≤32
THD@500Hz	≤3.0
THD@800Hz	≤3.0
THD@1600Hz	≤3.0
Freq Range F1	≤400
Freq Range F2	≥4000
Battery Current(mA)	≤1.0

IEC-118-7/2005 (2cc-coupler)

## Testing Diagram

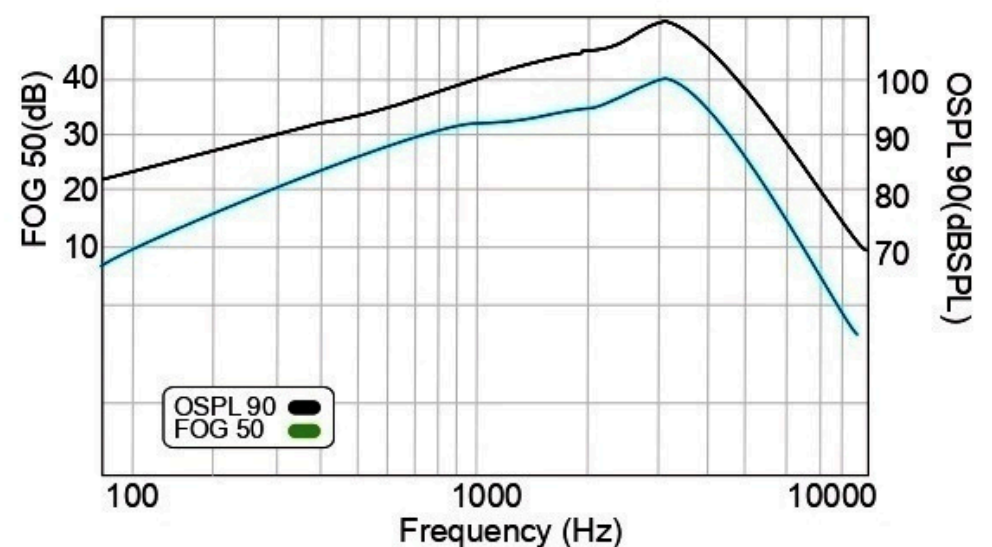

## IMHear Corporation

Add:1503 Brook Dr Downers Grove,IL 60515 US TEL: 001-630-395-9628  
 Website: www.imhearing.com Email: info@imhear.comcastbiz.net