



hearing aids are more comfortable to wear and allow for quicker, more accurate adjustments.




Flute H ITE

Specifications

- * Optimized DSP hearing aid
- * Up to 16 channels WDRC multi memories amplifier
- * 12 Bands Frequency Shaping
- * 10 Bands Layered Noise Reduction
- * Adaptive feedback cancellation
- * Up to four programs
- * Low Battery Warning
- * Telecoil function (optional)


Fitting Range

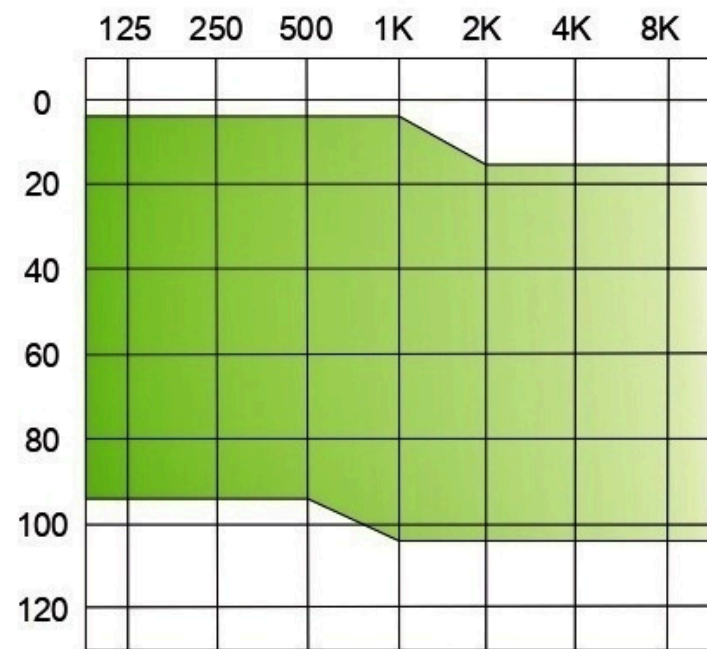

Technical Data

| | Flute H ITE |
|---------------------|-------------|
| Maximum Output | 130 |
| HFA Avg Output | 121 |
| Maximum Gain | 58 |
| HFA Avg Gain | 49 |
| EQ Input Noise | ≤30 |
| THD@500Hz | ≤3.0 |
| THD@800Hz | ≤3.0 |
| THD@1600Hz | ≤3.0 |
| Freq Range F1 | ≤600 |
| Freq Range F2 | ≥4800 |
| Battery Current(mA) | ≤1.2 |

Testing Diagram

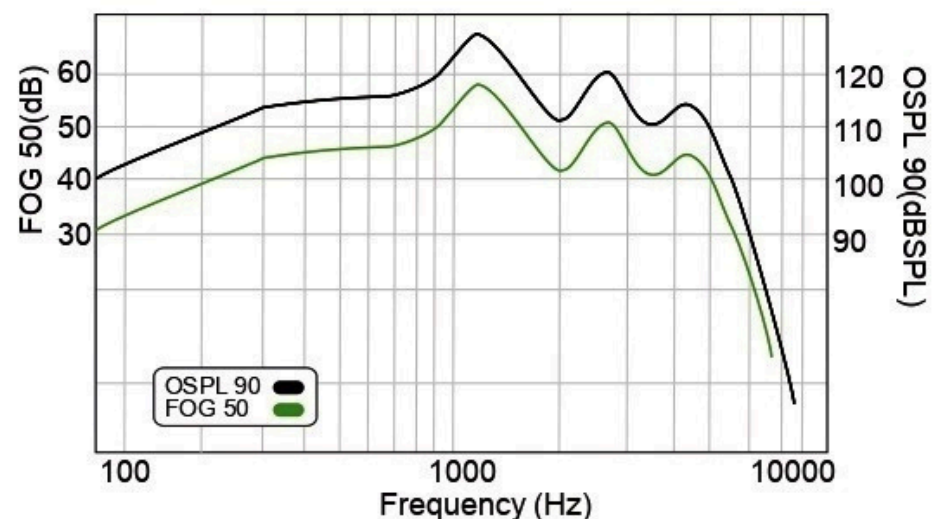

IEC-118-7/2005 (2cc-coupler)

IMHear Corporation

Add:1503 Brook Dr Downers Grove,IL 60515 US TEL: 001-630-395-9628
 Website: www.imhearing.com Email: info@imhear.comcastbiz.net