




Forte offers the strong power that severe hearing loss users require and the sound quality that they appreciate. The Directional Microphone for conversations in noise environment and the multi-purpose Telecoil in this high performance, multi-memory product makes the Forte especially attractive to professionals, educators of the dear and consumers.

- * Volume Control
- * Push button
- * Directional Microphone
- * 13A battery
- * Telecoil
- * Dimensions: 39.6x14.6x9.4 mm




Forte

Specifications

- * High-Performance DSP hearing aid
- * Up to 32 channels WDRC multi memories amplifier
- * 12 Bands Frequency Shaping
- * 12 Bands Layered Noise Reduction (Advanced)
- * 3rd generation of industry-leading AFC technology
- * Multi channles MPO Control
- * Low Battery Warning
- * Switch Tones
- * Power-on Delay
- * Adaptive Directional Microphone
- * Up to 4 programs
- * Programmable by CS44 Programming Cable

Fitting Range

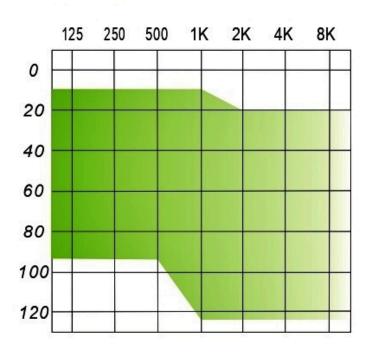

Technical Data

	Forte
Maximum Output	136
HFA Avg Output	129
Maximum Gain	75
HFA Avg Gain	60
EQ Input Noise	≤32
THD@500Hz	≤3.0
THD@800Hz	≤2.5
THD@1600Hz	≤1.5
Freq Range F1	≤350
Freq Range F2	≥5000
Battery Current(mA)	≤2.0

	Forte
Maximum Output	136
HFA Avg Output	129
Maximum Gain	75
HFA Avg Gain	60
EQ Input Noise	≤32
THD@500Hz	≤3.0
THD@800Hz	≤2.5
THD@1600Hz	≤1.5
Freq Range F1	≤350
Freq Range F2	≥5000
Battery Current(mA)	≤2.0

ANSI S3.22-2003

Testing Diagram

